


标准规格

型号	NMHS4-16D	NMHS4-20D	NMHS4-25D	NMHS4-32D	NMHS4-40D	NMHS4-50D	NMHS4-63D	
缸径(mm)	16	20	25	32	40	50	63	
介质	空气							
使用压力范围(MPa)	0.2~0.6MPa			0.1~0.6MPa				
环境和流体温度(°C)	-10~60°C(未冻结)							
重复精度(mm)	±0.01mm							
最大使用频率(c.p.m.)	120c.p.m			60c.p.m				
润滑	不需要							
动作方式	双作用							
注)夹紧力N	外径夹持	10	19	31	55	88	140	251
0.5MPa	内径夹持	12	21	35	61	97	153	268
手指行程(mm)		4	4	6	8	8	12	16
重量(g)		66	110	154	300	390	590	1095



型号表示方法

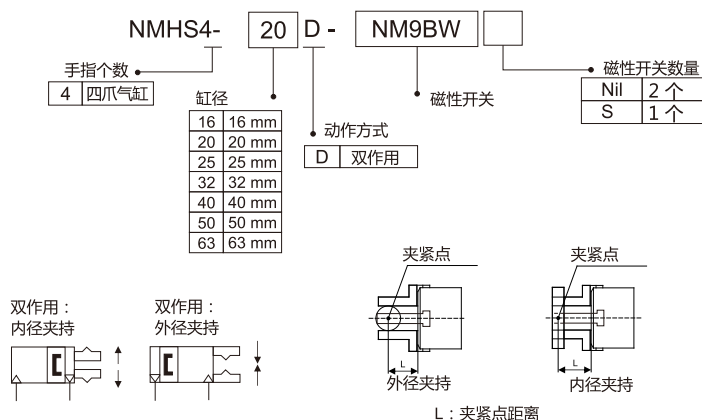

订货举例





1)所需缸径: 50, 需磁性开关
 正确型号: NMHS4-50D
 ND-M9BL 2个磁性开关
 NBMG2-012 2个磁性开关安装码

行程/磁性开关型号表





缸径 mm	磁性开关 无触点		磁性开关 安装码
	2线	3线NPN	
16~25	ND-M9BL	ND-M9NL	NBMG2-012
32~125			

有力夹紧点

外部夹持








内部夹持








有力夹紧点


外部夹持力



内部夹持力




NMHS4-□ Φ16D/Φ25D

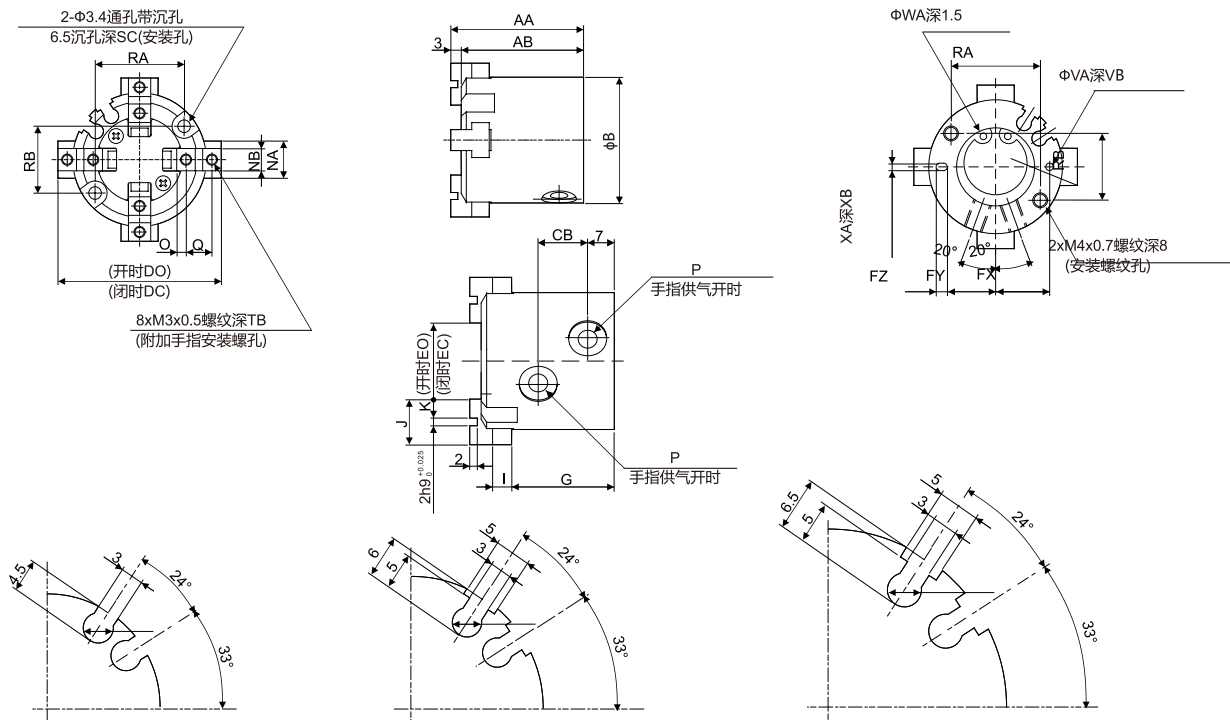

型号	AA	AB	B	CB	DC	DO	EC	EO	FX	FY	FZ	G	I	J	K	NA	NB
NMHS4-16D	35	32	30	11	33	37	13	17	12.5	11	3	25	4	10	4	8	5h9 ₀ ⁰ _{-0.030}
NMHS4-20D	38	35	36	13	39	43	15	19	14.5	13	3	27	5	12	5	10	6h9 ₀ ⁰ _{-0.030}
NMHS4-25D	40	37	42	15	48	54	20	26	17	14.5	5	28	5	14	6	12	6h9 ₀ ⁰ _{-0.030}

型号	O	P	Q	RA	RB	SC	TB	VA	XB	WA	XA	VB
NMHS4-16D	2	M3 x 0.5	6	18	16	8	5	2H9 ₀ ^{+0.025} ₀	2	17H9 ₀ ^{+0.043} ₀	2H9 ₀ ^{+0.025} ₀	2
NMHS4-20D	2.5	M5 x 0.8	7	24	18	9.5	6	2H9 ₀ ^{+0.025} ₀	2	21H9 ₀ ^{+0.052} ₀	2H9 ₀ ^{+0.025} ₀	2
NMHS4-25D	3	M5 x 0.8	8	26	22	10	6	3H9 ₀ ^{+0.025} ₀	3	26H9 ₀ ^{+0.052} ₀	3H9 ₀ ^{+0.025} ₀	3





NMHS4-□ Φ32D/Φ40D

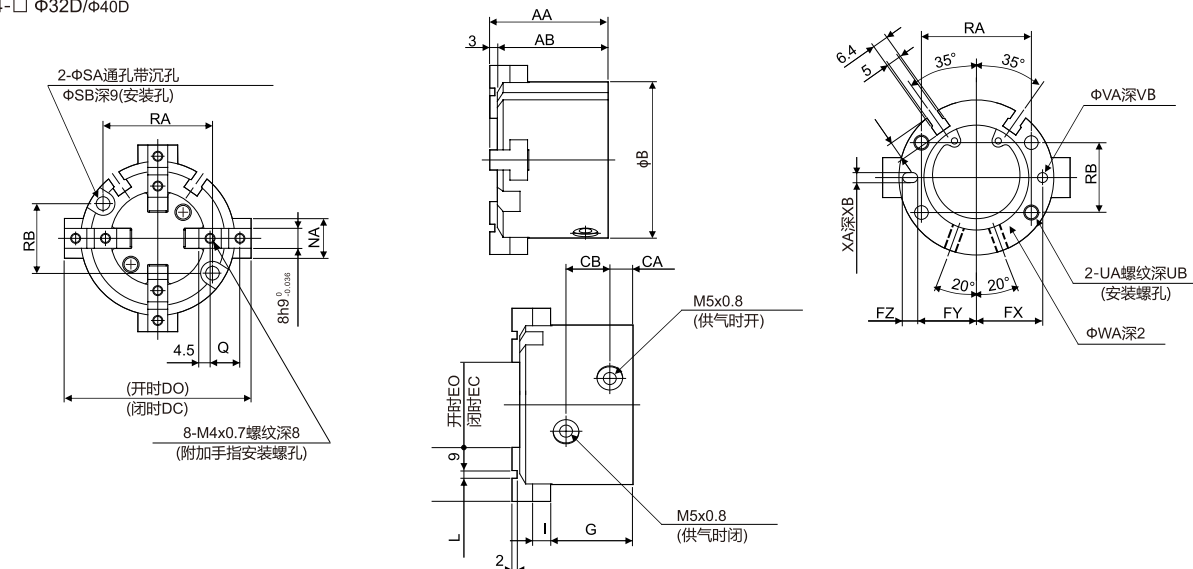

型号	AA	AB	B	CA	CB	DC	DO	EC	EO	FX	FY	FZ	G	I	J	L
NMHS4-32D	44	41	56	8	16	60	68	20	28	23	20.5	5	30.5	6	20	2H9 ₀ ^{+0.025} ₀
NMHS4-40D	47	44	62	9	17	66	74	24	32	26.5	23.5	6	32	7	21	3H9 ₀ ^{+0.025} ₀

型号	NA	Q	RA	RB	SA	SB	UA	UB	VA	VB	WA	XA	XB
NMHS4-32D	14	11	38	25	4.5	8	M5 x 0.8	10	3H9 ₀ ^{+0.025} ₀	3	34H9 ₀ ^{+0.062} ₀	3H9 ₀ ^{+0.025} ₀	3
NMHS4-40D	16	12	44	28	5.5	9.5	M6 x 1	12	4H9 ₀ ^{+0.030} ₀	4	42H9 ₀ ^{+0.062} ₀	4H9 ₀ ^{+0.030} ₀	4



NMHS4-□ Φ50D/Φ63D

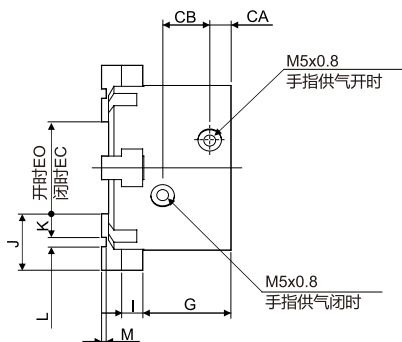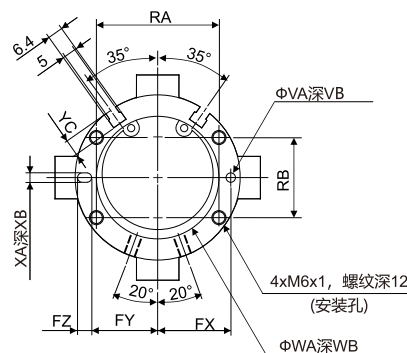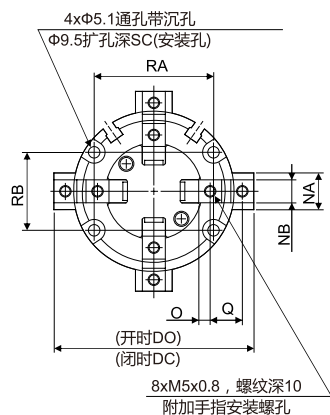

(mm)

型号	AA	AB	AC	B	CA	CB	DC	DO	EC	EO	FX	FY	FZ	G	I	J	K	L
NMHS4-50D	55	52	3	70	9	20	74	86	26	38	31	28	6	37.5	9	24	10	4H9 ^{+0.030} ₀
NMHS4-63D	66	62	4	86	12	22	91	107	35	51	38	34.5	7	44	11	28	11	6H9 ^{+0.030} ₀

型号	M	NA	NB	O	Q	RA	RB	SC	VA	VB	WA	WB	XA	XB	YG
NMHS4-50D	2	18	10h9 ⁰ _{-0.036}	5	14	52	34	12	4H9 ^{+0.030} ₀	4	52H9 ^{+0.074} ₀	2	4H9 ^{+0.030} ₀	4	7
NMHS4-63D	3	24	12h9 ⁰ _{-0.043}	5.5	17	66	38	14	5H9 ^{+0.030} ₀	5	65H9 ^{+0.074} ₀	2.5	5H9 ^{+0.030} ₀	5	7.5

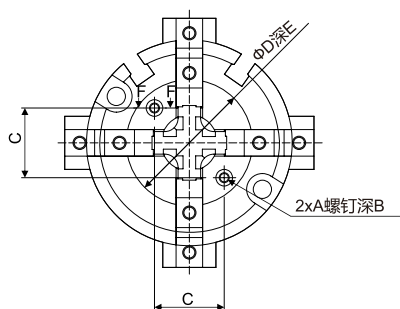

(mm)

型号	A	B	C	ΦD	E
NMHS4-16D	M2 x 0.4	5.5	11	21 ^{+0.1} ₀	0.5
NMHS4-20D		5.4	13	24 ^{+0.1} ₀	0.6
NMHS4-25D			15	27 ^{+0.1} ₀	
NMHS4-32D	M3 x 0.5	5.2	18	32 ^{+0.1} ₀	0.8
NMHS4-40D		8	21	38 ^{+0.1} ₀	1
NMHS4-50D			24	42 ^{+0.1} ₀	
NMHS4-63D			32	54 ^{+0.1} ₀	